

PVC-U - CHECK BALL VALVE
SCH 80 (INCHES)

MATERIALS

Retaining ring: PP
Ball and o'ring gasket: EPDM
Body and remaining components: PVC-U

STANDARDS

The jointing valves: by jointing always using appropriate glues.
The screwing valves: by screwing according to ASTM F 1498 recommendations.

ASSEMBLY

The jointing valves: by jointing always using appropriate glues.
The screwing valves: by screwing according to ISO 7/1 recommendations.


SERVICE PRESSURE

The service pressure, just as an indication, is of 10 bar at 20°C (water) or 6 bar at 40 °C (water).

ABBREVIATION INTERPRETATION

D - Nominal diameter
G - Nominal diameter of the screw
Quant - Quantity of fittings that each box contains
Gr - Approximate weight of fittings in grams
F - Box 39 x 30 x 12

PVC-U - CHECK BALL VALVE
SCH 80 (INCHES)

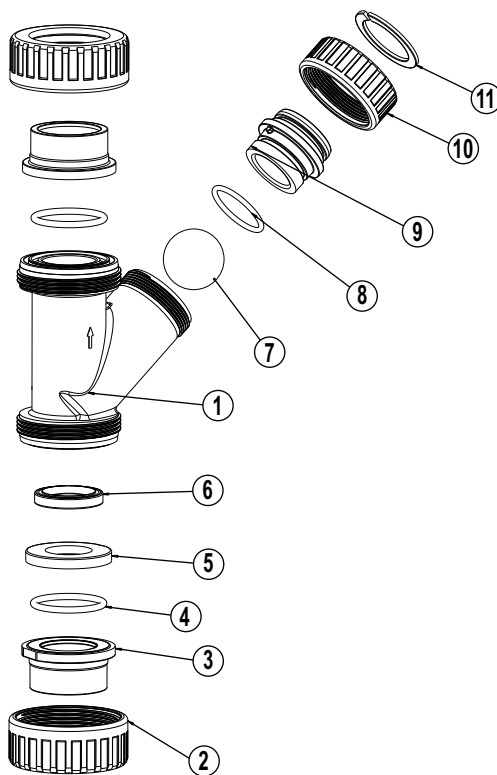

N° REF.	COMPONENT	MATERIAL	QUANT.	N° REF.	COMPONENT	MATERIAL	QUANT.
1	Body	PVC-U	1	7	Ball	EPDM	1
2	Nut	PVC-U	2	8	O'Ring	EPDM	1
3	Union end	PVC-U	2	9	Plug	PVC-U	1
4	O'ring	EPDM	2	10	Nut	PVC-U	1
5	Clamp ring	PVC-U	1	11	Retention ring	PP	1
6	Gasket	EPDM	1				